

NATIONAL CERA LAB

CERAMIC LABORATORY

Shop No. 16, 17, Ground Floor, Dariyalal Plaza,
Nr. Argil Ceramic, 8-A, N/H, Morbi - 363 642 (Guj.) INDIA.

As per all Countries Export report of Wall, Floor, Vitrified Tiles & Sanitary Wares

Ref. No.


Date :

Report No. NCL/Glazed Porcelain Tiles/BS EN/Pendulum/03/063/2023-24

Issue Date of Report March. 06. 2024

Receive date of test sample :- 05.03.2024

Issued To
M/s ART TILE LLP
Morbi - Jetpar Road ,Nr Narmda Canal
At - Sapar , Dist - Morbi ; Gujarat ; INDIA.

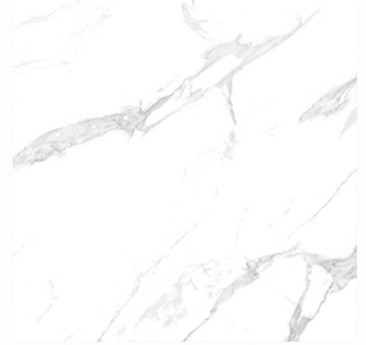

SAMPLE DECRPTION & NAME: Marble Carrara

Glazed Porcelain Tiles size 600x600 mm (Recified) as submitted by the party. Sample not drawn by National Cera Lab.

TEST DESIRED: BS EN : 14411 : 2012 (Group B I a) ANNEX - G

ANTI SKID RESISTANCE (COEFFICIENT OF FRICTION) TEST (WET)

AREA	Classifica	Wet Pendulum SRV Range Slider 96 rubber	AS/NZS National contribution of floor surface to the risk of slipping when wet
WET	P 0	< 12	Very Bad
	P 1	12 to 24	Very High
	P 2	25 - 34	High
	P 3	35 - 44	Moderate
	P 4	45 - 54	Low
	P 5	> 54	Very Low

TEST REPORT

PENDULUM TEST WET ACCORDING TO EN 16165:2021, Annex C
(ANTISKID)
RUBBER SLIDER 4S (Simulated Standard Shoe Shole) RUBBER WITH HARDNESS IRHD 96±2
WET VALUE OF PENDULUM FRICTION TESTER

Test Merhod

EN 16165 : 2021
Annex C

AVERAGE VALUE OF PENDULUM
(FIVE READING)

Sr no	WET VALUE
1	38
2	40
3	40
4	38
5	38

Average: 38.8

Tested by
N J Kavar
Nimesh Kavar (Testing Eng.)

Checked & Verified By
[Signature]
Jerambhai Kavar(QM/TM)

Reviewed & Approved By
[Signature]
Jerambhai Kavar(QM/TM) 06/03/2024

End of the test report

(Page 1 of 1)